

Annual materials and carbon report 2022

| Document reference | Status | Description | Revision | Date |
|-------------------------|--------|---------------------|----------|------------|
| 000-SAW-ZZ-ZZ-FN-S-0001 | S2 | Fit for information | P03 | 24/01/2023 |

Introduction

Smith and Wallwork is a civil and structural engineering design company based in Cambridge. We carry out the structural design of buildings and the civil engineering aspects associated with those buildings. Our projects range from small private houses through to large building projects, the largest completed construction project to date is £40m.

Founded in 2012, we started recording the quantities of structural materials used in our projects from day one. This is our third annual report on the materials and carbon used in our projects – more specifically structural materials installed on site in 2022 and the CO2 emissions associated with the production, fabrication, transport and installation on site of those materials (ie lifecycle stages A1-A5). The methodology used to apportion materials to a date range and the figures used to calculate carbon are explained in this report.

2022 Materials and Carbon

In 2022 Smith and Wallwork had 9 live construction projects totalling 30,904m² of floor area (of which 12606m² is assumed to have been completed during the period). Of the 9 projects 1 was a refurbishment and extension project, 1 was an art installation, and the remaining were new build. 5 of the 8 building projects were greenfield developments.

11,757 t (the total tonnage of structural material used on our sites in 2022)

3,050 tCO2e (the total emission associated with these structural materials, stages A1-A5)

Some key statistics from the structural materials used in 2022, 2021 and 2020 and the 9 projects in which these materials were deployed are provided below. These figures include sub- and super-structure data.


| | 2022 | 2021 | 2020 | |
|-----------------------|-------|--------|-------|-----------|
| Concrete | 9,781 | 13,368 | 8,250 | t |
| Steel (incl. rebar) | 741 | 899 | 460 | t |
| Timber | 1,142 | 1,130 | 914 | t |
| Masonry | 93 | 104 | 31 | t |
| Average building mass | 911 | 1,029 | 1,249 | kg/m2 |
| Max building mass | 1,610 | 1,610 | 2,195 | kg/m2 |
| Min building mass | 309 | 309 | 472 | kg/m2 |
| Average CO2 | 231 | 249 | 287 | kgCO2e/m2 |
| Max CO2 | 347 | 347 | 514 | kgCO2e/m2 |
| Min CO2 | 54 | 54 | 161 | kgCO2e/m2 |

000-SAW-SI-XX-FN-S-0001_2022 Page 1 of 7



Sankey Diagram of 2022 Materials Use

The diagram below is to scale and represents the flow of structural materials to our sites in 2022. The units used are tonnes of structural material. The steel tonnage includes both structural steel and rebar.

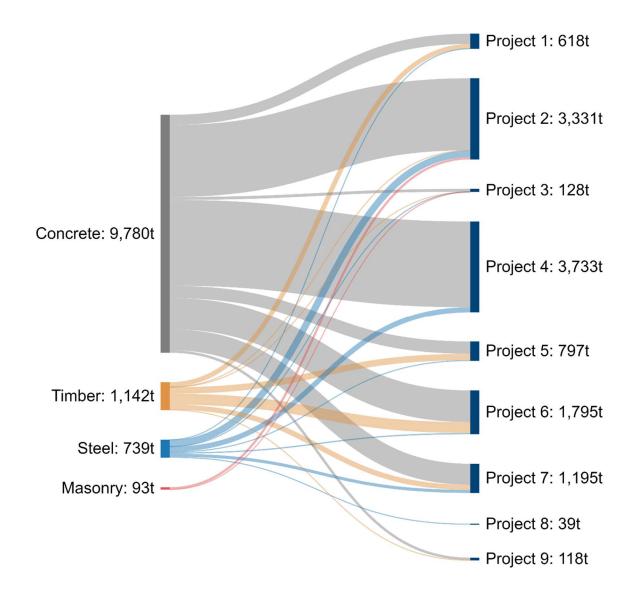

000-SAW-SI-XX-FN-S-0001_2022 Page 2 of 7



Methodology and Data

This section describes the extent of structural materials recording, the assumptions made on when materials are installed on site and finally the dataset used in calculating CO2 emissions associated with structural materials.

Structural Materials Recorded

Smith and Wallwork records structural materials for sub-structure and super-structure as set out below. For the annual figures reported these are either RIBA stage 4 information or where a building has been completed a mix of Smith and Wallwork figures are used in combination with as-built figures given by the various sub-contractors.

| | recorded | Not recorded |
|----------|---|--|
| Concrete | Insitu structural concrete | Blinding concrete |
| | Precast structural concrete | Screeds |
| Steel | Primary structural steelwork | Secondary steelwork |
| | Structural steel decking | Cold-formed steelwork |
| | Reinforcing bar in concrete | Steel cladding |
| | Steel sheet piling | |
| Timber | Primary timbers and decking/sheetingGlulam | Secondary timber and decking/sheeting |
| | • CLT | |
| Masonry | Structural load bearing masonry only | Masonry claddingInternal non-loadbearing masonry partitions |

It should be noted that RIBA stage 4 information for projects that have just started on site within the annual reporting year may include some estimates for structural materials such as rebar quantities, concrete and sheet pile quantities etc.

Installation of Structural Materials

Each project at Smith and Wallwork is recorded with a start on site date and a completion date. These dates are used to apportion the installation of structural materials on site.

Smith and Wallwork has chosen to apportion the installation of structural materials on a project over the entire construction period. Furthermore, structural materials are assumed to be installed at a consistent rate throughout the construction period. Strictly speaking this assumption is incorrect as typically on a building project, most of the construction materials will have been installed within the first half of the overall construction period.

This simplification in reporting the installation of materials on construction sites provides a smoothingout of the reported material use on Smith and Wallwork construction sites. Some projects will be under-reported and some over-reported.

000-SAW-SI-XX-FN-S-0001_2022 Page 3 of 7



CO2 Emissions of Structural Materials

Background Information

The lifecycle stages in BS EN 15978 and BS EN 15804 are used to define the amount of carbon released at the different stages of a material or products life.

A1-A3: Product stage

A4-A5: Construction process

• B1-B6: Use stage

C1-C4: End of life stageD: Beyond end of life

Some studies have shown that stages A1-A3 and B1-B6 together account for more than 90% of the life cycle of a building's carbon emissions with a balanced distribution of emissions between the two.

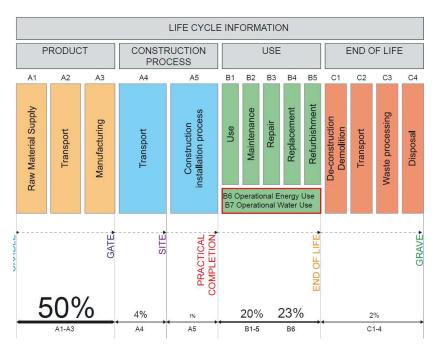


Figure: Lifecycle stages (ref.: The Structural Engineer July 2020)

It should be noted that the calculation of the CO2 emissions associated with structural materials is a new area of research and implementation. The available pool of datasheets is relatively small and as such it can be difficult to justify data. As the dataset of materials and products gets larger the reliability of data is likely to increase. In this respect, care should be taken when comparing historic carbon data as each year our carbon data is reviewed and updated.

Also of note is the origin of structural materials used on site. A change in location of manufacture can significantly alter the CO2 figures.

Whilst the foundations and structure are likely to form the largest component of CO2 emissions in stage A it is worth noting that different structural solutions can have impacts of finishes applied as well as operational energy (and hence CO2 emissions).



Smith and Wallwork Dataset

Several assumptions have been made in order to establish a set of embodied carbon data for structural engineering materials and products. A summary of the various figures and factors used are presented below. The source of data is The Institution of Structural Engineer's 'How to calculate embodied carbon' guide (second edition, published 2022).

| (kgCO2e/kg) | A1-A3 | A4 | A5a | A5w | A1-A5 |
|-----------------------------------|-------|-------|-------|-------|-------|
| Steel sections | 1.435 | 0.096 | 0.092 | 0.015 | 1.639 |
| Steel sections UK | 1.740 | 0.032 | 0.092 | 0.018 | 1.882 |
| Steel section Europe | 1.130 | 0.160 | 0.092 | 0.013 | 1.395 |
| Steel section World | 1.580 | 0.160 | 0.092 | 0.018 | 1.850 |
| Steel profile decking | 2.550 | 0.032 | 0.092 | 0.026 | 2.700 |
| Rebar | 1.360 | 0.096 | 0.046 | 0.078 | 1.580 |
| Rebar UK | 0.760 | 0.032 | 0.046 | 0.043 | 0.881 |
| Rebar World | 1.960 | 0.160 | 0.046 | 0.113 | 2.279 |
| CLT | 0.250 | 0.160 | 0.092 | 0.022 | 0.524 |
| Glulam | 0.280 | 0.160 | 0.185 | 0.022 | 0.647 |
| Concrete (insitu unreinforced) | 0.103 | 0.005 | 0.014 | 0.007 | 0.129 |
| Concrete (insitu 50kg/m3 rebar) | 0.130 | 0.007 | 0.015 | 0.008 | 0.161 |
| Concrete (insitu 100kg/m3 rebar) | 0.157 | 0.009 | 0.016 | 0.010 | 0.192 |
| Concrete (insitu 150kg/m3 rebar) | 0.185 | 0.011 | 0.017 | 0.011 | 0.224 |
| Concrete (precast unreinforced) | 0.178 | 0.032 | 0.014 | 0.002 | 0.227 |
| Concrete (precast 50kg/m3 rebar) | 0.189 | 0.033 | 0.015 | 0.003 | 0.239 |
| Concrete (precast 100kg/m3 rebar) | 0.232 | 0.036 | 0.016 | 0.005 | 0.290 |
| Concrete (precast 150kg/m3 rebar) | 0.260 | 0.038 | 0.017 | 0.007 | 0.322 |
| Blockwork | 0.280 | 0.032 | 0.012 | 0.083 | 0.406 |
| Brickwork | 0.213 | 0.032 | 0.019 | 0.066 | 0.330 |
| | | | | | |

For Smith and Wallwork standard embodied calculations the following data has been used:

- An average value for UK and European steel sections is taken for A1-A3.
- An average value for UK and global rebar is taken for A1-A3.
- An average UK concrete mix of C30/37 with 35% cement replacement material is taken for insitu concrete for A1-A3.
- An average UK mix of C40/50 is taken for precast concrete for A1-A3.

Transport carbon factors (A4) for movement of materials and products between factory and site are based on local, national and European scenarios.

| A4 factor | km | | |
|----------------------|------|-------|-----------|
| Local manufacture | 50 | 0.005 | kgCO2e/kg |
| National manufacture | 300 | 0.032 | kgCO2e/kg |
| Europe manufacture | 1500 | 0.160 | kgCO2e/kg |

000-SAW-SI-XX-FN-S-0001_2022 Page 5 of 7



On site assembly carbon factors (A5a) are based on simplified data from the RICS relating construction cost to emissions. This can be related to material use through a relationship between material and construction costs based on previous SAW projects. Using data from 33 Smith and Wall projects at RIBA stage 4 and 5, construction cost is on average 6.6 times higher than the material cost. Using this information an A5a material factor can be found.

| RICS A5a factor SAW Cost Factor | 700 6.6 | kgCO2e/£100k Construction cost Construction Cost/Material Cost | | | | |
|------------------------------------|------------|--|------|------|------|-------|
| Material costs supply and install | | | | | | |
| Steel | 2.0 | £/kg | 2000 | £/t | 7850 | kg/m3 |
| Rebar | 1.0 | £/kg | 1000 | £/t | 7850 | kg/m3 |
| Concrete | 0.3 | £/kg | 750 | £/m3 | 2500 | kg/m3 |
| CLT | 2.0 | £/kg | 1000 | £/m3 | 500 | kg/m3 |
| Glulam | 4.0 | £/kg | 2000 | £/m3 | 500 | kg/m3 |
| Blockwork | 0.3 | £/kg | 500 | £/m3 | 2000 | kg/m4 |
| Brickwork | 0.4 | £/kg | 750 | £/m3 | 1800 | kg/m5 |

On site waste carbon factors (A5w) are based on simplified data from the RICS and local disposal of waste. Waste percentages range from 1% to 5% for structural materials and products but can be as high as 20% for some construction products. Timber manufacturing waste is assumed to go to landfill where the sequestered carbon in the timber is released to atmosphere.

The component of A5w = WF*(A1+A2+A3+A4+C2+C3+C4).

| A5w factor | | |
|------------------------------|-------|-----------|
| Steel frame | 0.010 | |
| Steel rebar | 0.053 | |
| Concrete insitu | 0.053 | |
| Concrete precast | 0.010 | |
| Timber frame CLT | 0.010 | |
| Timber frame glulam | 0.010 | |
| Blockwork | 0.250 | |
| Brickwork | 0.250 | |
| | | |
| C2 waste from site | 0.005 | kgCO2e/kg |
| C3-4 waste disposal (timber) | 1.770 | kgCO2e/kg |
| C3-4 waste disposal | 0.013 | kgCO2e/kg |


000-SAW-SI-XX-FN-S-0001_2022 Page 6 of 7



Historic Data

Smith and Wallwork has been collecting data on materials use since its inception in 2012. The chart below shows the structural material used on construction sites from 2014 onwards.

The information shown on materials and carbon per engineer is derived from the total annual mass divided by the total number of technical staff (full time equivalent).

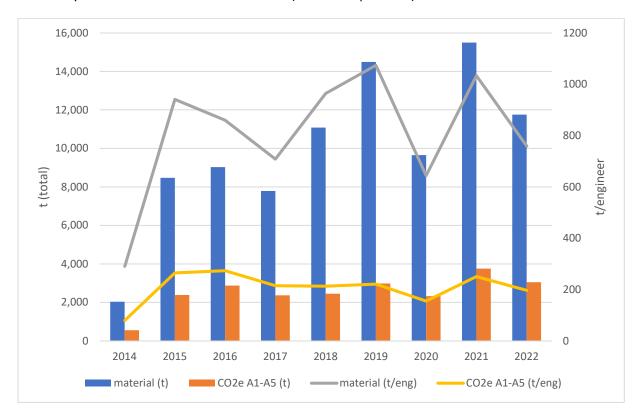

000-SAW-SI-XX-FN-S-0001_2022 Page 7 of 7